

规格书编号

SPEC NO :

# 产品规格书

# SPECIFICATION

CUSTOMER 客户: \_\_\_\_\_  
PRODUCT 产品: SAW FILTER  
MODEL NO 型号: HDBF07006C64 SF6-4  
PREPARED 编制: \_\_\_\_\_ CHECKED 审核: \_\_\_\_\_  
APPROVED 批准: \_\_\_\_\_ DATE 日期: 2008-8-28

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司  
Shoulder Electronics Limited

## 更改历史记录 History Record

更改日期 Date	规格书编号 Spec. No.	产品型号 Part No.	客户产品型号 Customer No.	更改内容描述 Modify Content	备注 Remark

### 1. SCOPE

This specification shall cover the characteristics of SAW filter BF07006C64


### 2. ELECTRICAL SPECIFICATION

DC Voltage VDC	0V
AC Voltage Vpp	10V50Hz/60Hz
Operation temperature	-40°C to +85°C
Storage temperature	-40°C to +85°C
Input Power	10dBm

#### Electronic Characteristics


Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	-	70.0	-
Insertion Loss	dB	-	23.8	25.5
2 dB Bandwidth	MHz	-	6.10	6.20
25 dB Bandwidth	MHz	-	6.96	7.0
40 dB Bandwidth	MHz	-	7.16	-
Passband Variation	dB		0.45	1.0
Absolute Delay	usec	-	4.00	-
Ultimate Rejection	dB	50	55	-
Material Temperature coefficient	KHz/°C	-	-6.58	-
Substrate Material	-		YZ LN	
Ambient Temperature	°C		25	

### 3. DIMENSION

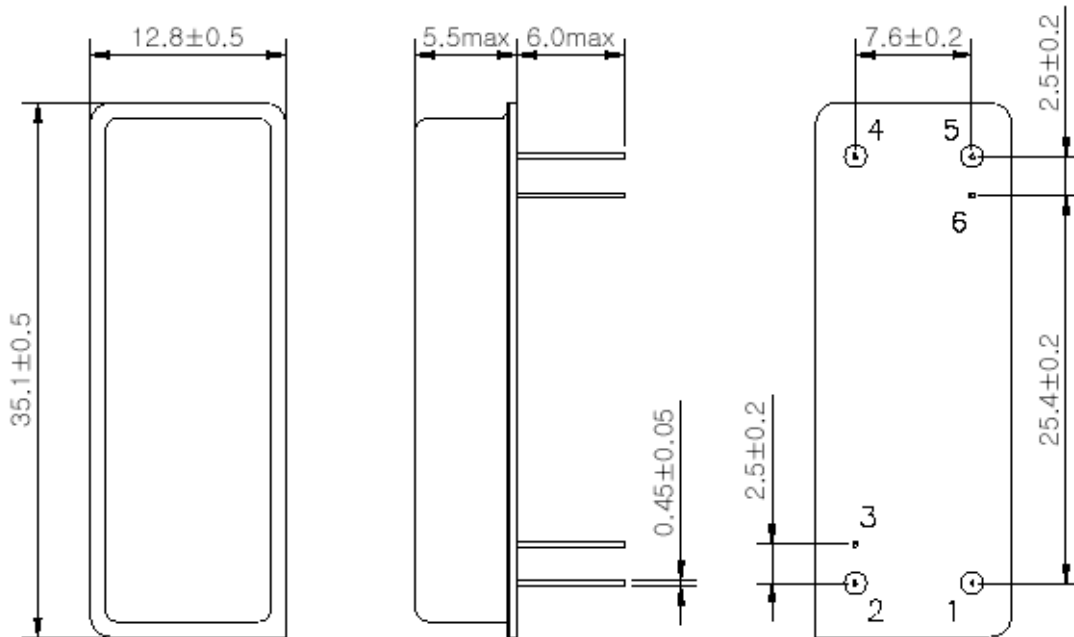

Pin Configuration	
1	Input
5	Output
2, 4	Ground
Other	Case ground

## 4. TEST CIRCUIT

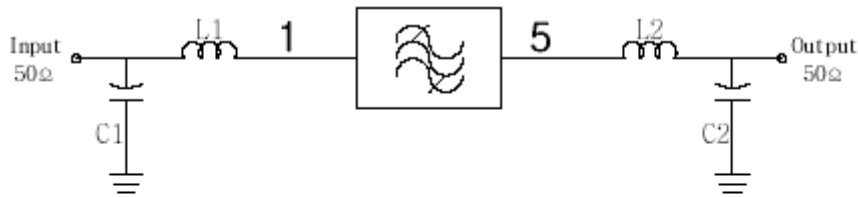

$$L1 = 120\text{nH}, L2 = 150\text{nH}, C1 = C2 = 100\text{pF}$$

## 5. ENVIRONMENTAL CHARACTERISTICS

### 5-1 High temperature exposure

Subject the device to +85°C for 16 hours. Then release the filter into the room conditions for 24 hours prior to the measurement. It shall fulfill the specifications in table 1.

### 5-2 Low temperature exposure

Subject the device to -20°C for 16 hours. Then release the device into the room conditions for 24 hours prior to the measurement. It shall fulfill the specifications in table 1.

### 5-3 Temperature cycling

Subject the device to a low temperature of -40°C for 30 minutes. Following by a high temperature of +80°C for 30 Minutes. Then release the device into the room conditions for 24 hours prior to the measurement. It shall meet the specifications in table 1.

### 5-4 Resistance to solder heat

Dip the device terminals no closer than 1.5mm into the solder bath at 260°C ±10°C for 10±1 sec. Then release the device into the room conditions for 4 hours. The device shall meet the specifications in table 1.

### 5-5 Solderability

Subject the device terminals into the solder bath at 245°C ±5°C for 5s, More than 95% area of the terminals must be covered with new solder. It shall meet the specifications in table 1.

### 5-6 Mechanical shock

Drop the device randomly onto the concrete floor from the height of 1m 3 times. the device shall fulfill the specifications in table 1.

### 5-7 Vibration

Subject the device to the vibration for 1 hour each in x,y and z axes with the amplitude of 1.5 mm at 10 to 55 Hz. The device shall fulfill the specifications in table 1.

#### 5-8 Lead fatigue

##### 5-8-1 Pulling test


Weight along with the direction of lead without an shock 1kg. The device shall satisfy all the initial Characteristics.

##### 5-8-2 Bending test


Lead shall be subject to withstand against 90°C bending with 450g weight in the direction of thickness. This operation shall be done toward both direction. The device shall show no evidence of damage and shall satisfy all the initial electrical characteristics.

## Typical frequency response


### 2dB Bandwidth & Ripple( $F_0 \pm 2.8$ MHz)

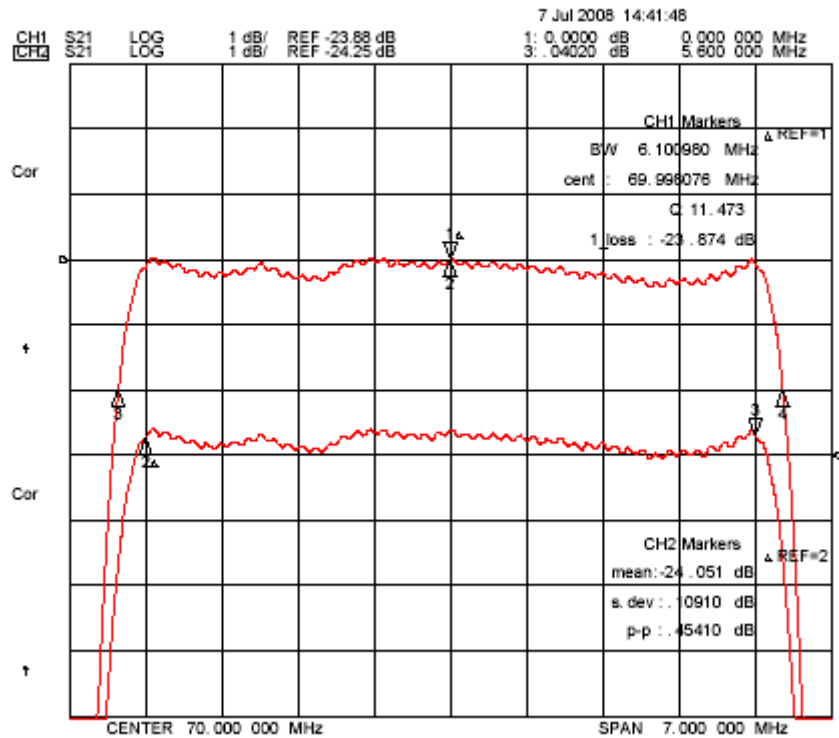


**3dB Bandwidth & Group Delay(Fo ± 2.8 MHz)**

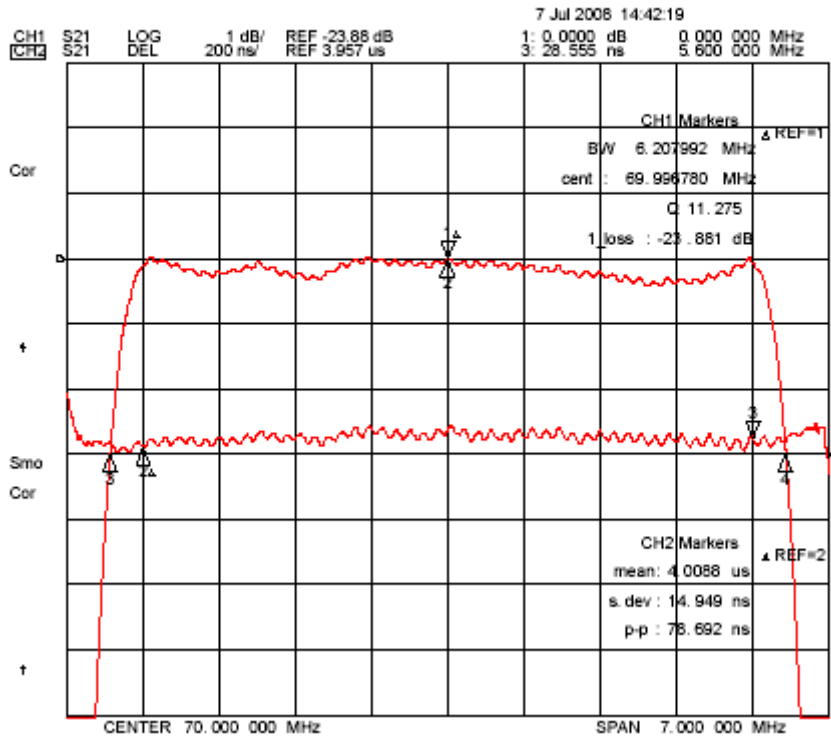


**25dB Bandwidth**

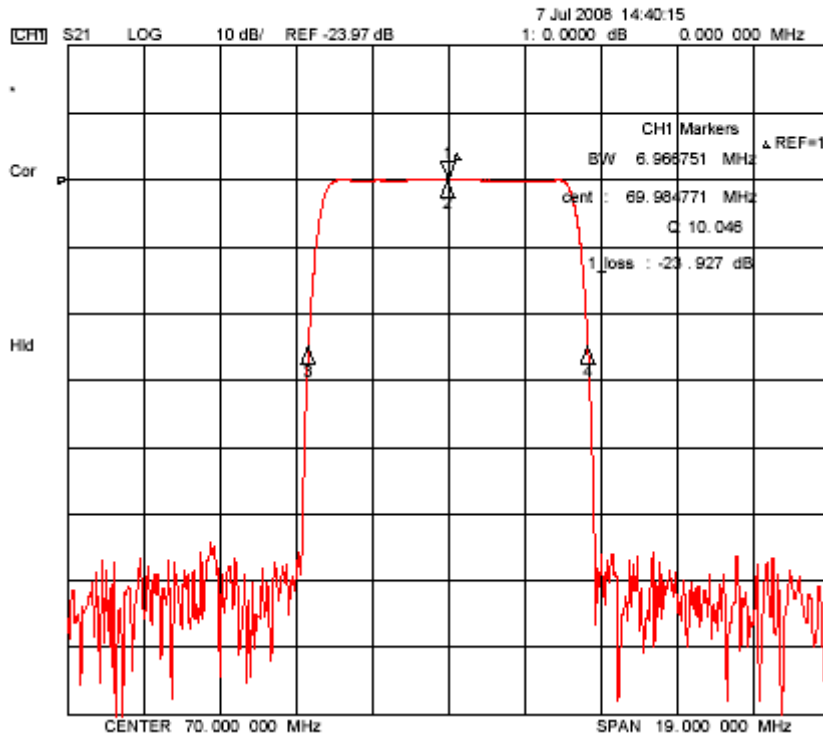


### 40dB Bandwidth

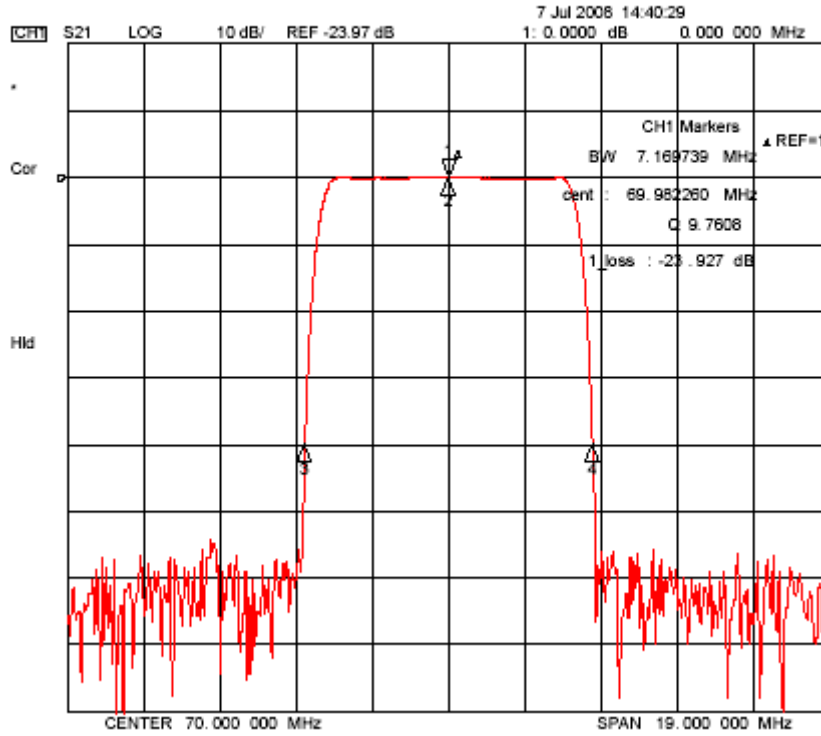

### Wide band Properties

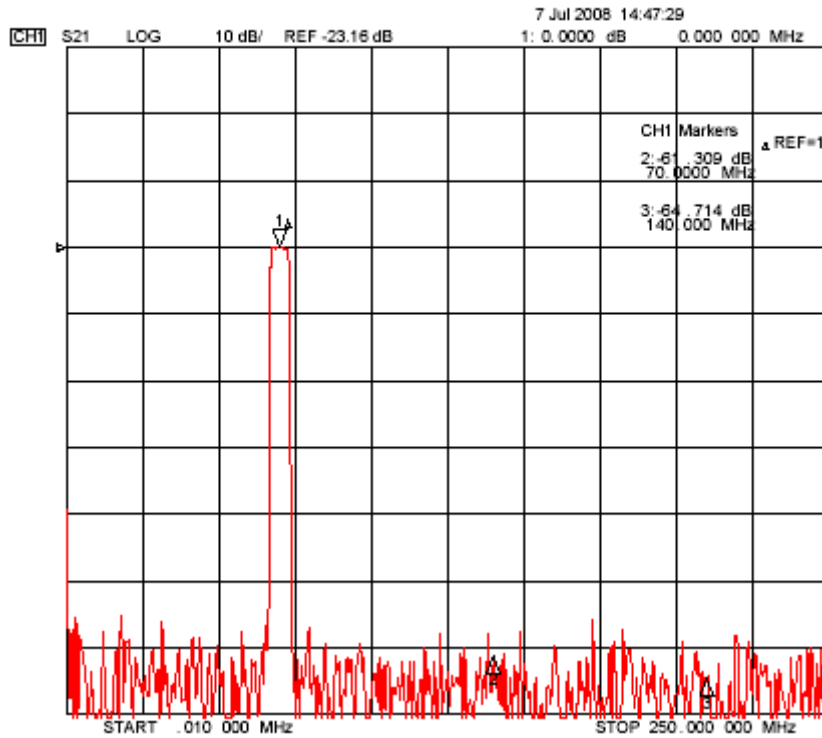

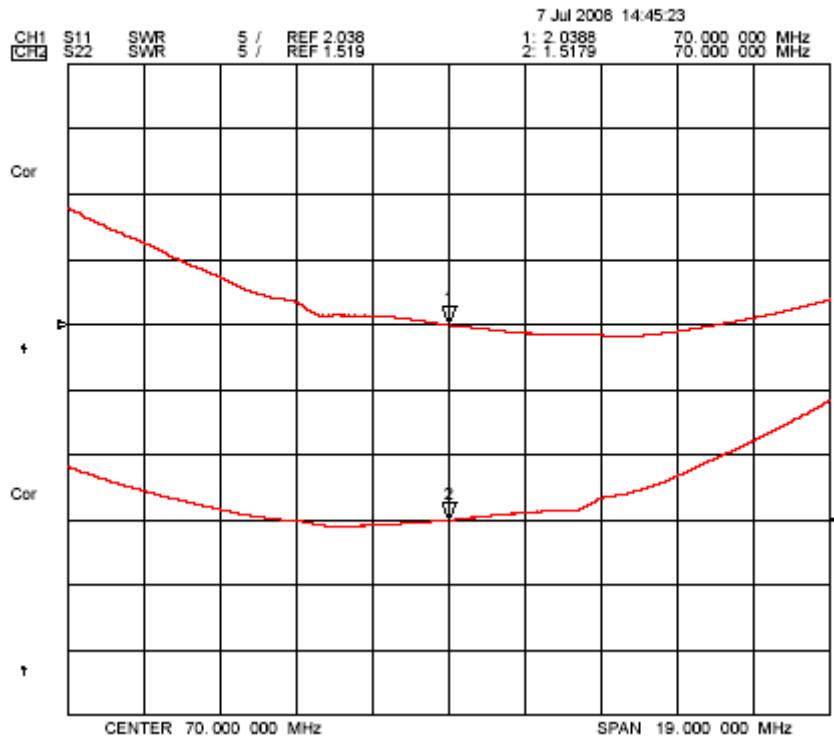**SWR(S11 & S22)****6. REMARK**

## 6.1 Static voltage

Static voltage between signal load & ground may cause deterioration & destruction of the component. Please avoid static voltage.

## 6.2 Ultrasonic cleaning

Ultrasonic vibration may cause deterioration & destruction of the component. Please avoid ultrasonic cleaning

## 6.3 Soldering

Only leads of component may be soldered. Please avoid soldering another part of component