

规格书编号

SPEC NO:

# 产品规格书

# SPECIFICATION

CUSTOMER 客户: \_\_\_\_\_

PRODUCT 产品: \_\_\_\_\_ SAW FILTER

MODEL NO 型号: \_\_\_\_\_ HDF833E-S6

MARKING 印字: \_\_\_\_\_ HDF6891


PREPARED 编制: \_\_\_\_\_ CHECKED 审核: \_\_\_\_\_

APPROVED 批准: \_\_\_\_\_ D A T E 日期: \_\_\_\_\_ 2013-8-9

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司  
Shoulder Electronics Limited

### 1. Package Dimension

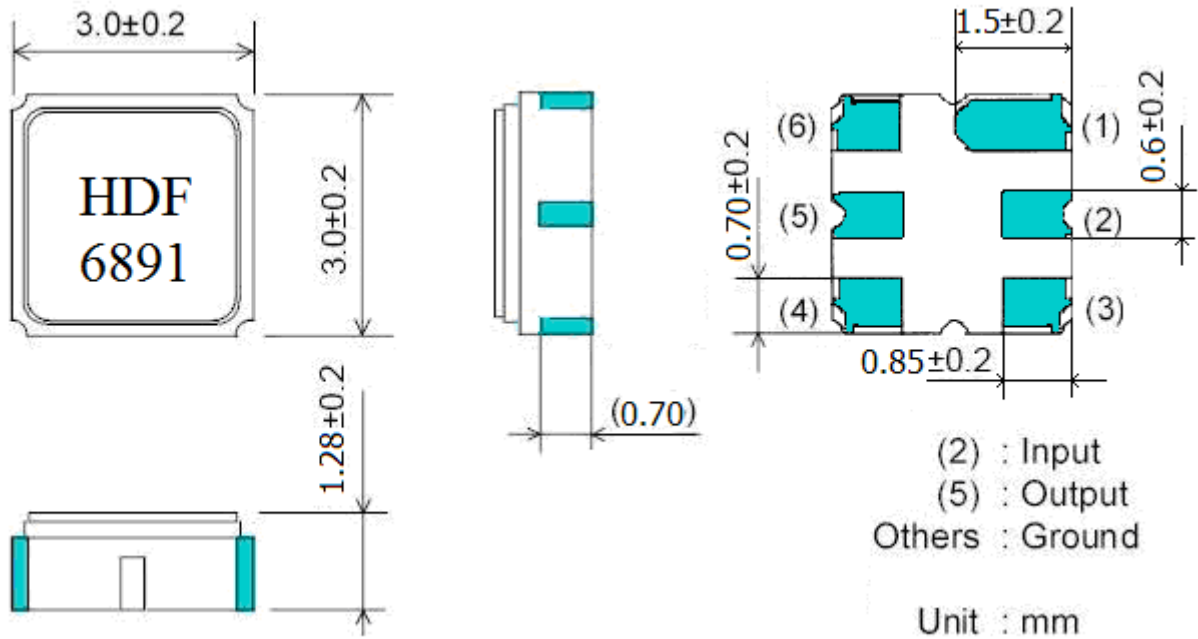


### 2. Maximum Rating

Storage Temperature Range	-40°C to +85°C
Maximum DC Voltage	10 V
Maximum Input Power	15 dBm

### 3. Performance

	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	-	833	-
Insertion Loss (817~849 MHz )	dB		2.5	3.5
Amplitude Ripple (817~849 MHz )	dB		1.0	1.5
Return Loss (817~849 MHz )	dB	10		
Attenuation				
DC~750 MHz	dB	40	50	-
750~800 MHz		35	50	
855~856 MHz		10		
862~894 MHz		20	24	
894~1200 MHz		30	40	
1200~2000 MHz		45	50	
Input/Output Impedance	Ohms		50	

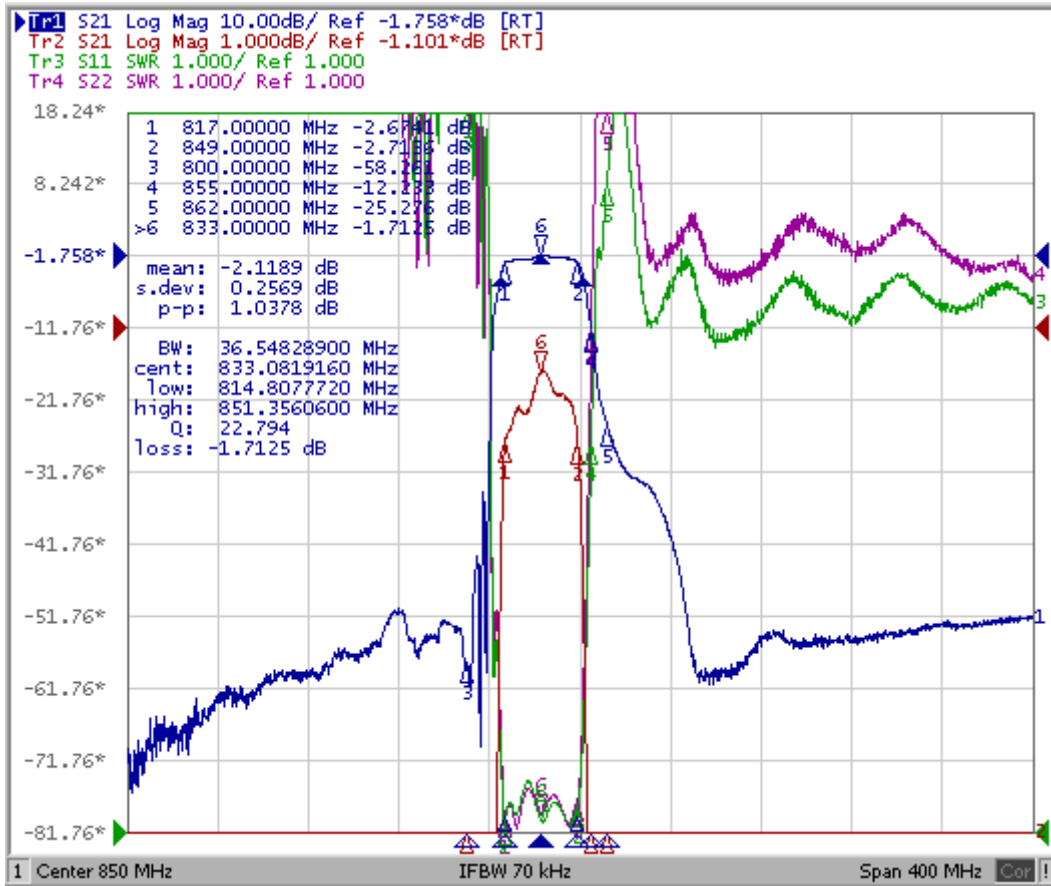

**Test Circuit**

