

规格书编号

SPEC NO:

# 产品规格书


## SPECIFICATION

CUSTOMER 客户: \_\_\_\_\_  
PRODUCT 产品: \_\_\_\_\_ SAW FILTER \_\_\_\_\_  
MODEL NO 型号: \_\_\_\_\_ HDF1207A-S6 \_\_\_\_\_  
PREPARED 编制: \_\_\_\_\_ CHECKED 审核: \_\_\_\_\_  
APPROVED 批准: \_\_\_\_\_ D A T E 日期: \_\_\_\_\_ 2012-11-20 \_\_\_\_\_

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司  
Shoulder Electronics Limited

## 1. Package Dimension

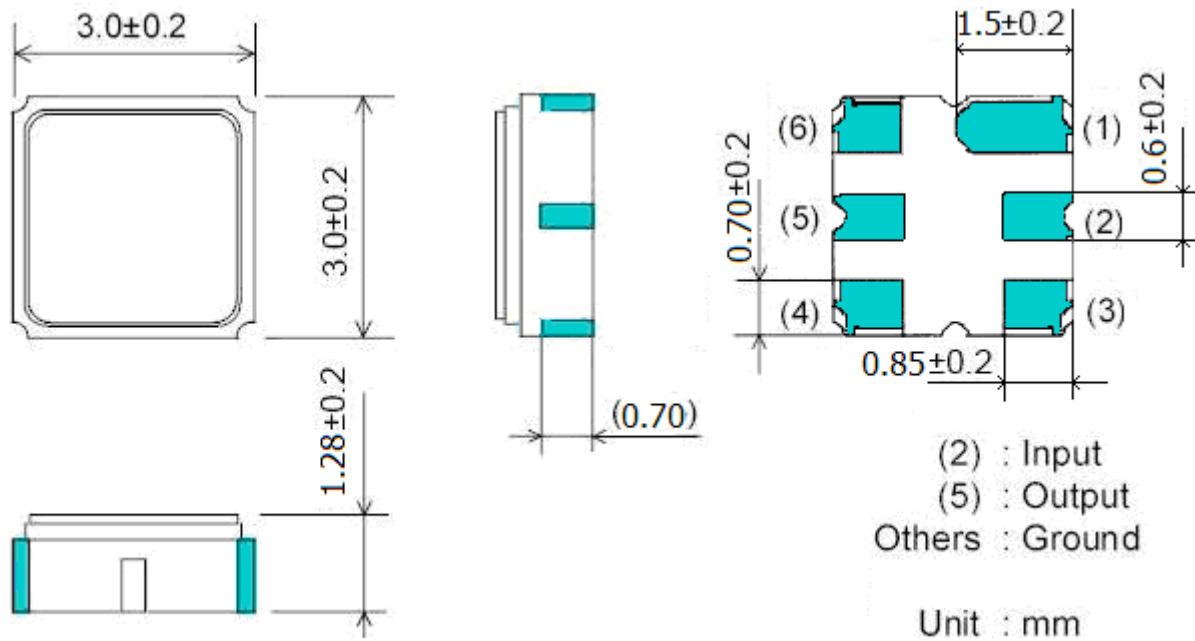


## 2. Performance

### 2.1 Maximum Rating

Items	Rating	unit
Maximum Working Voltage	10	V <sub>dc</sub>
Maximum Working Power	10	dBm
Operating Temperature Range	-45 ~ +85	°C
Storage Temperature Range	-55 ~ + 105	°C

### 2.2 Electronic Characteristics

Parameter	Min	Typ	Max	Units
Center Frequency		1207		MHz
Insertion Loss (1197~1217MHz)		2.5	4.0	dB
Pass band Variation (1197~1217MHz)		1.0	2.0	dB
VSWR (1197~1217MHz)		1.5	2.0	
Ultimate Rejection				dB
1120~1157MHz	35	40		
1257~1280MHz	40	50		
Material Temperature coefficient		-32		ppm/°C
Ambient Temperature		25		°C
Package		SMD-6		

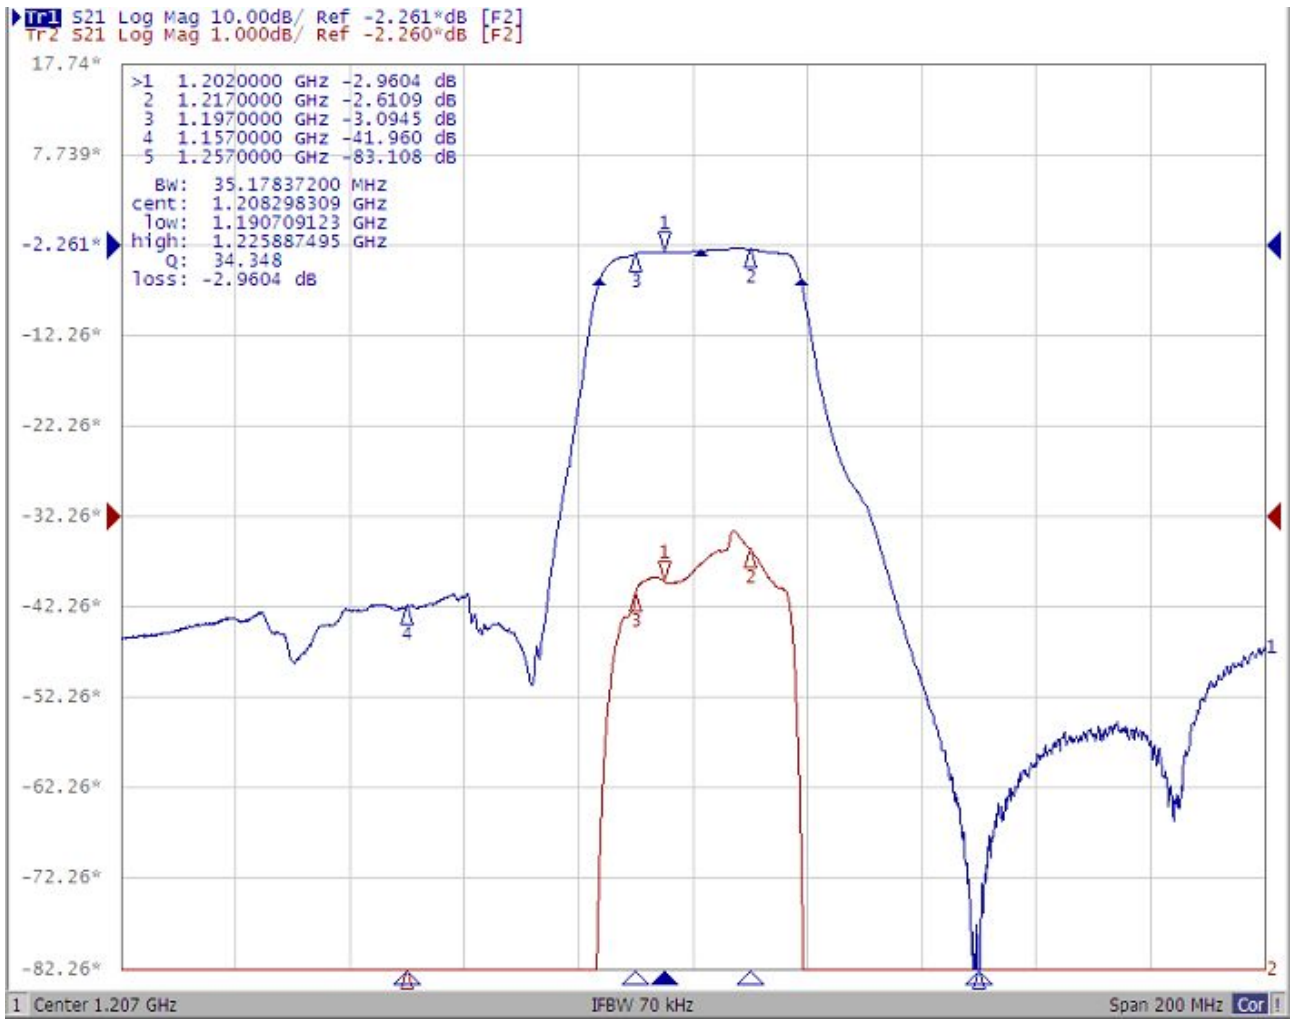

### 3. TEST CIRCUIT

