

规格书编号

SPEC NO:


产品规格书 SPECIFICATION

CUSTOMER 客户: _____
PRODUCT 产品: _____ SAW FILTER _____
MODEL NO 型号: _____ HDF1268T1-S6 _____
MARKING 印字: _____ HDF1268T1 _____
PREPARED 编制: _____ CHECKED 审核: _____
APPROVED 批准: _____ D A T E 日期: _____ 2013-10-15 _____

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司
Shoulder Electronics Limited

1. Package Dimension

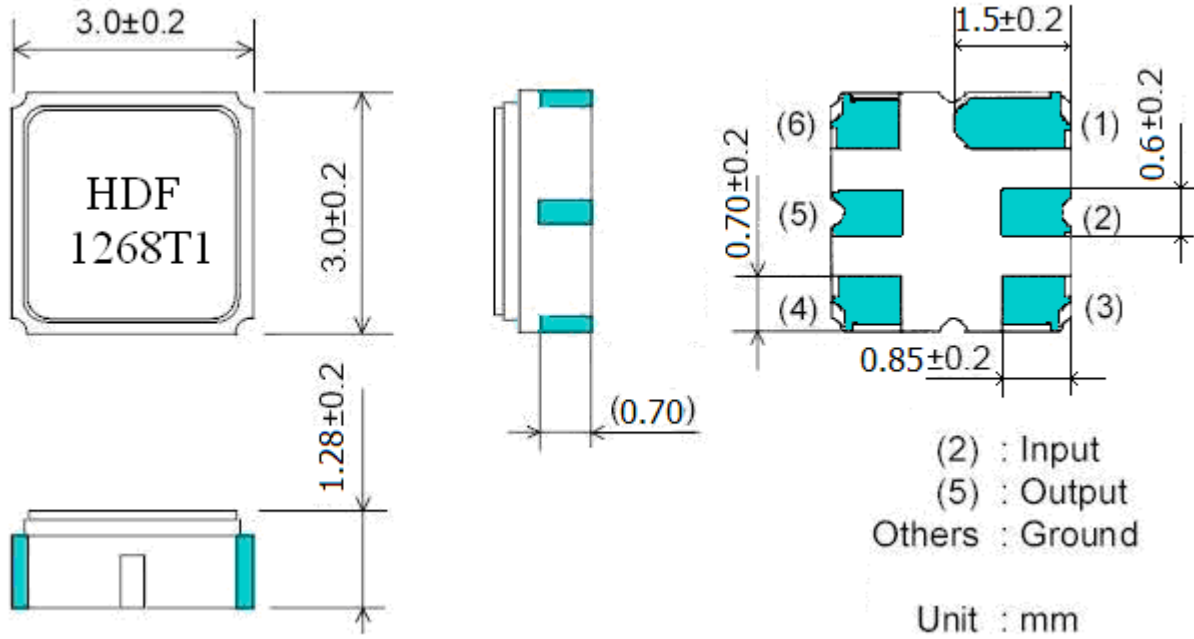


2. Performance

2.1 Maximum Rating

DC Voltage VDC	10V
AC Voltage Vpp	10V50Hz/60Hz
Operation temperature	-45°C to +85°C
Storage temperature	-45°C to +85°C
RF Power Level	10dBm

2.2 Electronic Characteristics

	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	-	1268.52	-
Insertion Loss (1258.29~1278.75MHz)	dB		1.8	3.0
Amplitude Ripple (1258.29~1278.75MHz)	dB		0.5	1.5
Bandwidth@3dB	MHz		57.8	
VSWR(1258.29~1278.75MHz)			1.6	2.1
Relative Attenuation				
1218.52 MHz	dB	30	35	-
1318.52MHz		30	40	
Input/Output Impedance	Ohms		50	

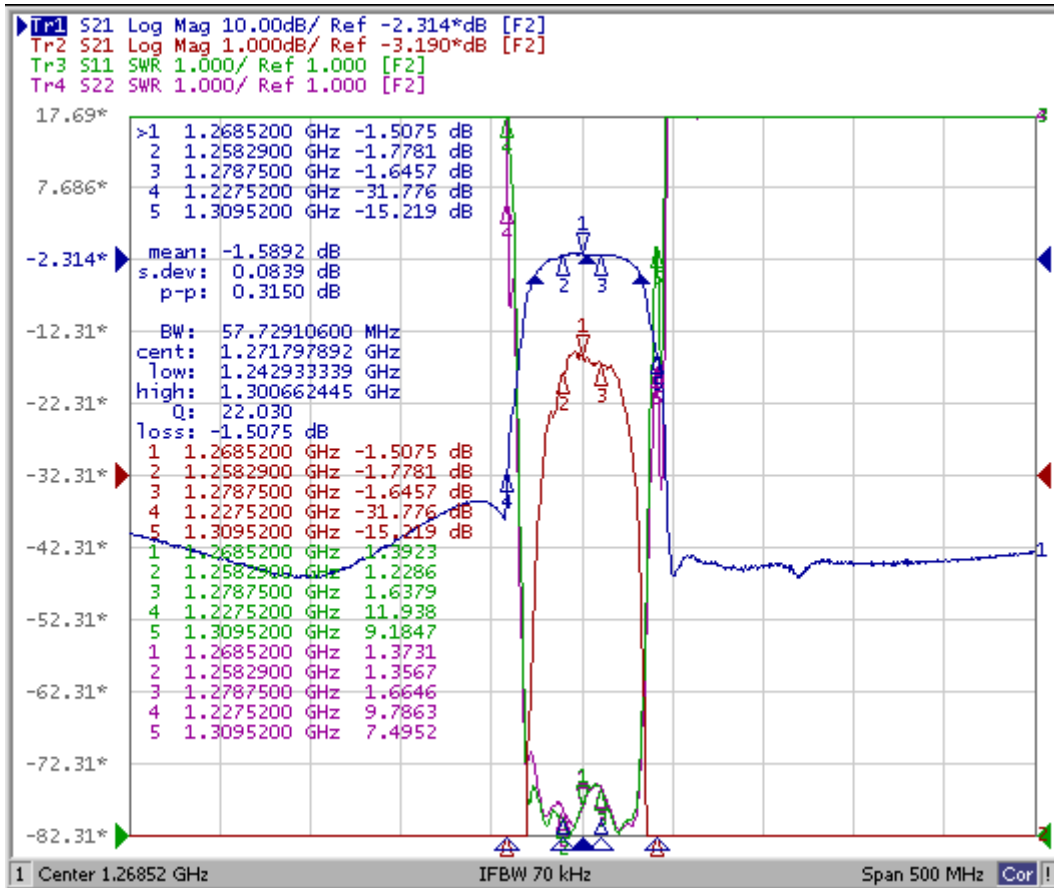

3. TEST CIRCUIT

