

规格书编号

SPEC NO:

产品规格书

SPECIFICATION

CUSTOMER 客户: _____

PRODUCT 产品: _____ SAW FILTER _____

MODEL NO 型号: _____ HDF1561A3-S6 _____

MARKING 印字: _____ 6G37 _____


PREPARED 编制: _____ CHECKED 审核: _____

APPROVED 批准: _____ D A T E 日期: _____ 2012-7-30 _____

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司
Shoulder Electronics Limited


1. Package Dimension

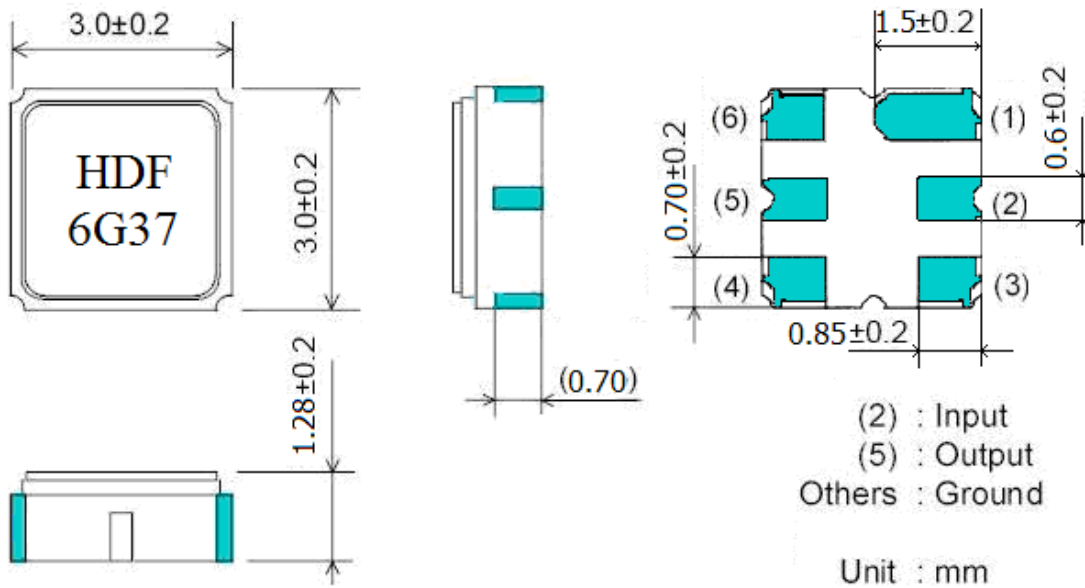

2. Maximum Rating

Operation Temperature Range	-40°C to +85°C
Storage Temperature Range	-40°C to +85°C
Maximum DC Voltage	10 V
Maximum Input Power	10 dBm

3. Performance

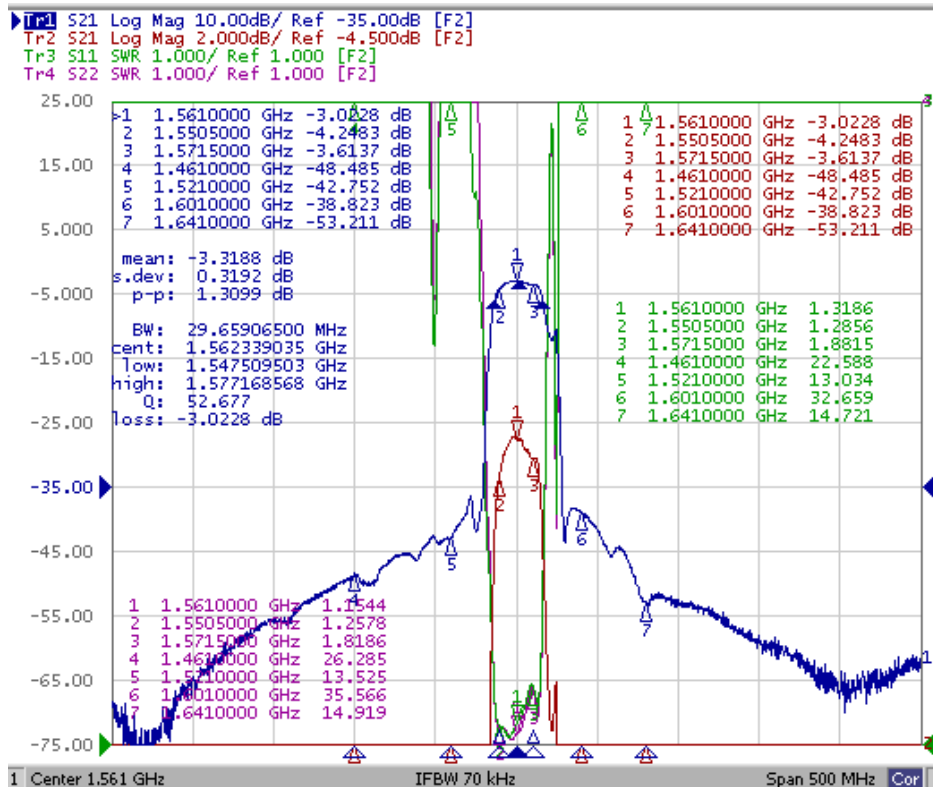

	Unit	Minimum	Typical	Maximum
Center Frequency F_c	MHz	-	1561	-
Insertion Loss (1550.5~1571.5 MHz)	dB		4.0	5.0
Amplitude Ripple(1550.5~1571.5 MHz)	dB		0.8	2.0
VSWR(1550.5~1571.5 MHz)			1.6	2.0
Absolute Attenuation				
$F_c-500 \sim F_c-100$ MHz	dB	35	38	-
$F_c-60 \sim F_c-40$ MHz		30	35	
$F_c+40 \sim F_c+60$ MHz		30	40	
$F_c+60 \sim F_c+500$ MHz		35	38	
Input/Output Impedance	Ohms		50	

Test Circuit
