

规格书编号

SPEC NO :

产品规格书


SPECIFICATION

CUSTOMER 客户: _____
PRODUCT 产品: _____ SAW FILTER _____
MODEL NO 型号: _____ HDF1566A3-S6 _____
PREPARED 编制: _____ CHECKED 审核: _____
APPROVED 批准: _____ D A T E 日期: _____ 2012-12-12 _____

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司
Shoulder Electronics Limited

1. Package Dimension

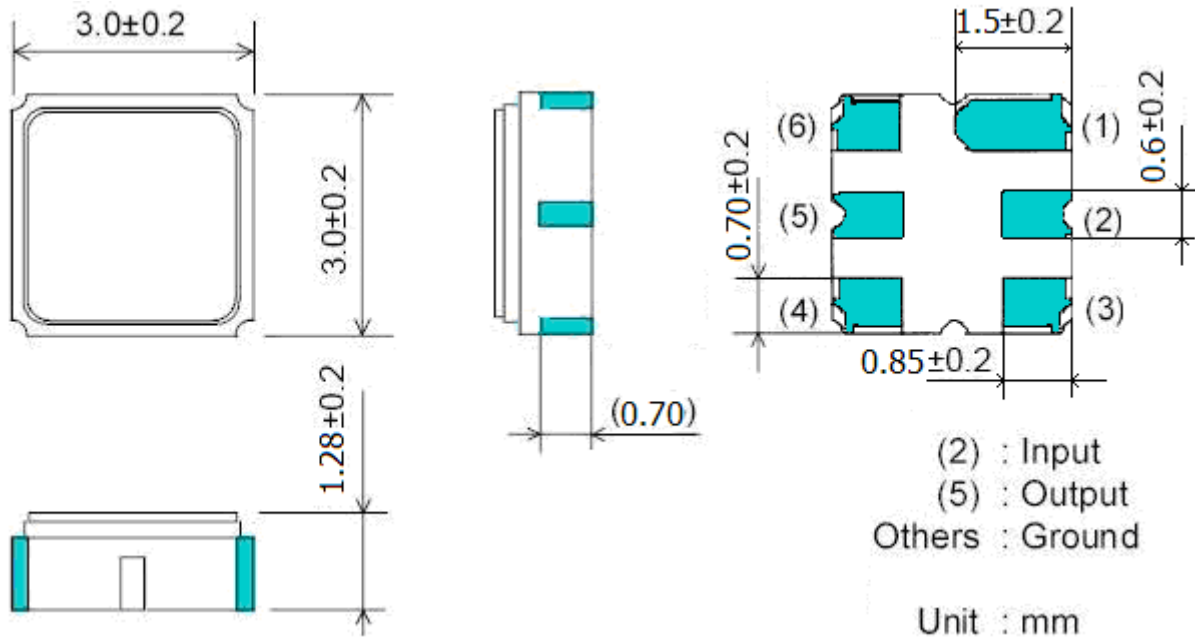

2. Performance


2.1 Maximum Rating

Operation Temperature Range	-45°C to +85°C
Storage Temperature Range	-45°C to +85°C
RF Power	10dBm

2.2 Electronic Characteristics

	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	-	1566	-
Insertion Loss (1573~1577MHz)	dB	-	4.0	4.5
Amplitude Ripple (1573~1577MHz)		-	1.0	1.5
VSWR(1573~1577MHz)		-	1.5	-
Attenuation				
0.3 MHz ~ 1300 MHz	dB	35	42	-
1300 MHz ~ 1520MHz		30	35	
1596 MHz ~1625MHz		30	45	
1625 MHz ~1800MHz		30	40	
Input/Output Impedance	Ohms		50	

2.3 Frequency Characteristics

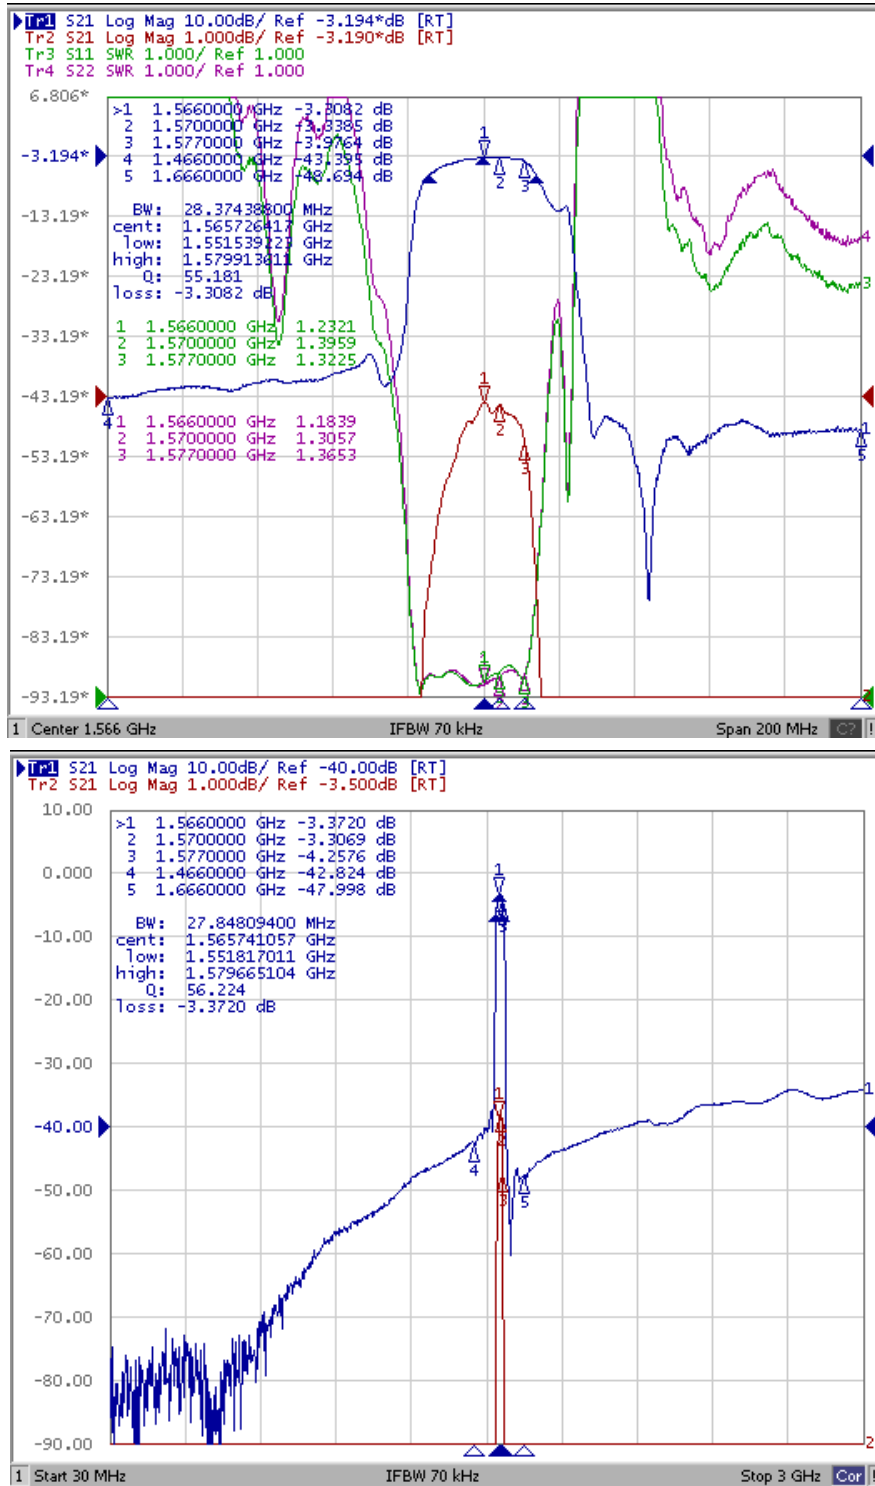

3. Test Circuit

