

规格书编号

SPEC NO :

产品规格书


SPECIFICATION

CUSTOMER 客户: _____
PRODUCT 产品: _____ SAW FILTER _____
MODEL NO 型号: _____ HDF1568A3-S6 _____
MARKING 印字: _____ HDF1568A3 _____
PREPARED 编制: _____ CHECKED 审核: _____
APPROVED 批准: _____ D A T E 日期: _____ 2013-12-30 _____

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司
Shoulder Electronics Limited

1. Package Dimension

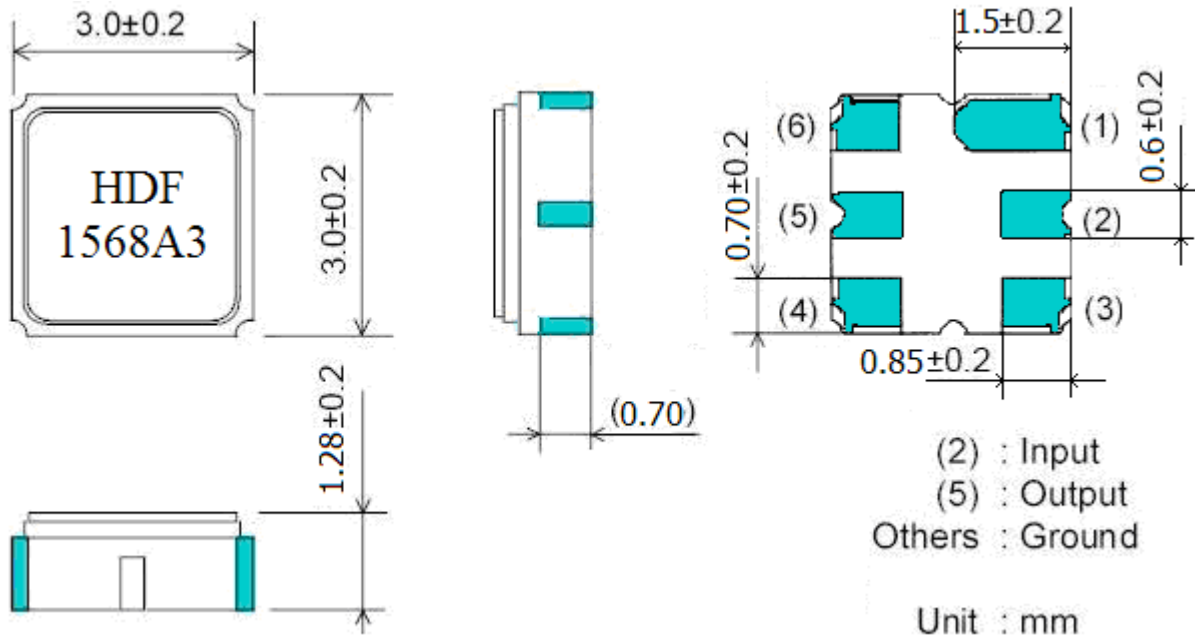

2. Performance


2.1 Maximum Rating

Operation Temperature Range	-45°C to +85°C
Storage Temperature Range	-55°C to +105°C
RF Power	10dBm

2.2 Electronic Characteristics

	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	-	1568.5	-
Insertion Loss (1559~1578 MHz)	dB	-	4.5	5.0
Amplitude Ripple (1559~1578MHz)		-	0.5	1.5
VSWR(1559~1578MHz)		-	1.5	2.0
Attenuation				
1568.5 ± 30 MHz	dB	30	35	-
1568.5 ± 50 MHz		35	40	
1568.5 ± 100 MHz		40	45	
Input/Output Impedance	Ohms		50	

2.3 Frequency Characteristics

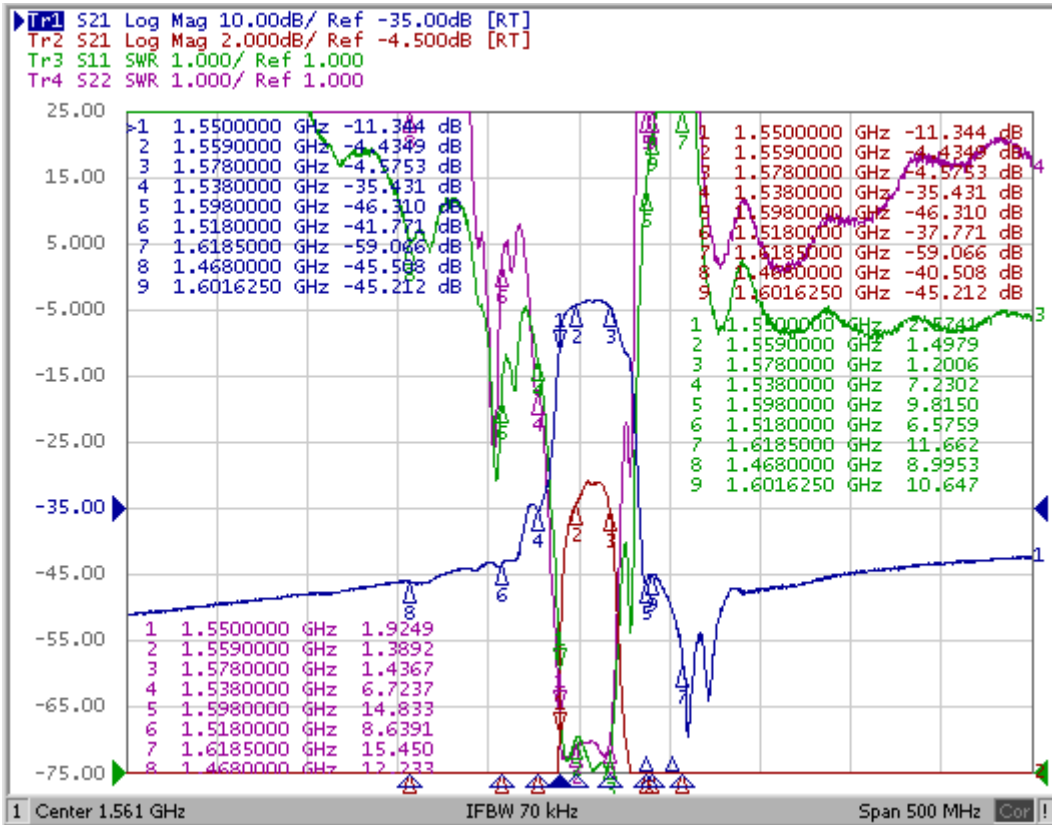

3. Test Circuit

