

规格书编号

SPEC NO:

产品规格书

SPECIFICATION

CUSTOMER 客户: _____

PRODUCT 产品: _____ SAW FILTER

MODEL NO 型号: _____ HDF1588S-S6


PREPARED 编制: _____ CHECKED 审核: _____

APPROVED 批准: _____ D A T E 日期: _____ 2014-1-17

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司
Shoulder Electronics Limited

1. Package Dimension

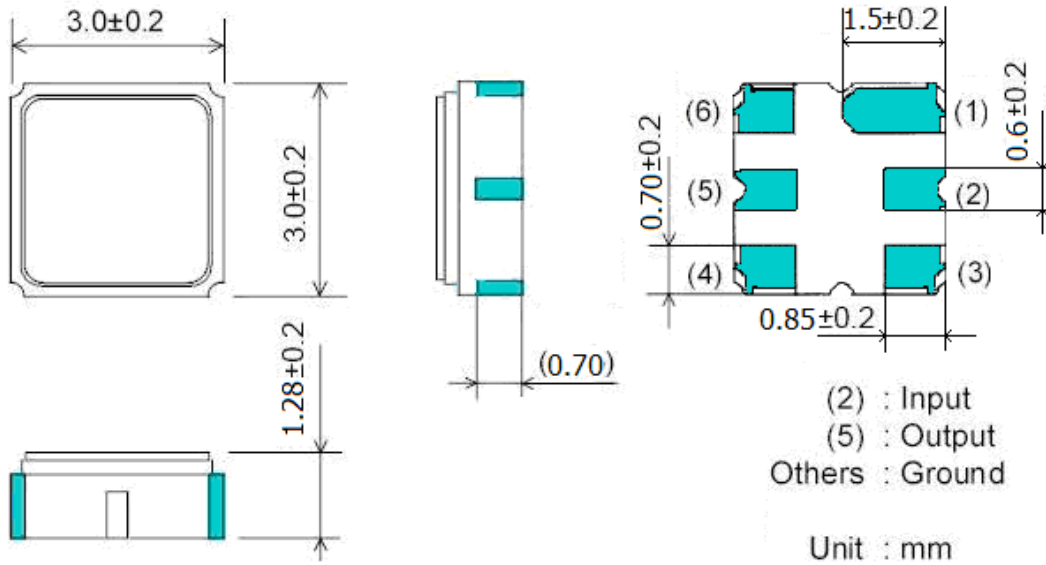

2. Performance

2.1 Maximum Rating


Items	Rating	unit
Maximum Working Power	10	dBm
Operating Temperature Range	-40 ~ +85	°C
Storage Temperature Range	-40 ~ +85	°C

2.2 Electronic Characteristics

(at 25°C ±5°C)

	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	-	1588	-
Insertion Loss (1560~1616 MHz)	dB		2.6	3.5
Ampilitude Ripple (1560~1616MHz)	dB		0.8	2.0
VSWR (1560~1616MHz)	dB		2.0	2.5
Attenuation				
100~1400 MHz		38	45	
1400~1525 MHz		25	35	
1645~1650 MHz	dB	8	25	-
1650~1840 MHz		25	30	
1840~2000 MHz		33	38	
2000~2500 MHz		30	-	
Input/Output Impedance	Ohms		50	

2.3 Frequency Characteristics

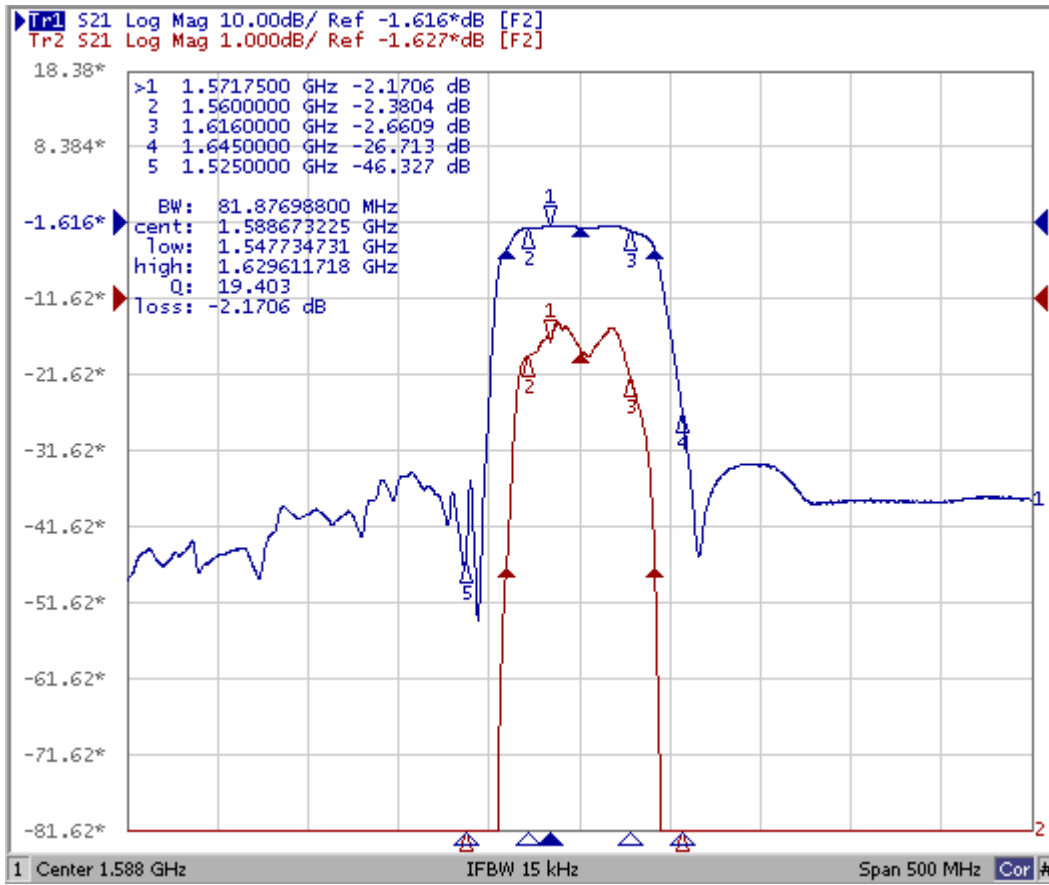

2.4

3. Test Circuit

