

规格书编号

SPEC NO:

产品规格书

SPECIFICATION

CUSTOMER 客户: _____

PRODUCT 产品: _____ SAW FILTER _____

MODEL NO 型号: _____ HDF1602A-S6 _____


PREPARED 编制: _____ CHECKED 审核: _____

APPROVED 批准: _____ D A T E 日期: _____ 2014-4-9 _____

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司
Shoulder Electronics Limited

1. Package Dimension

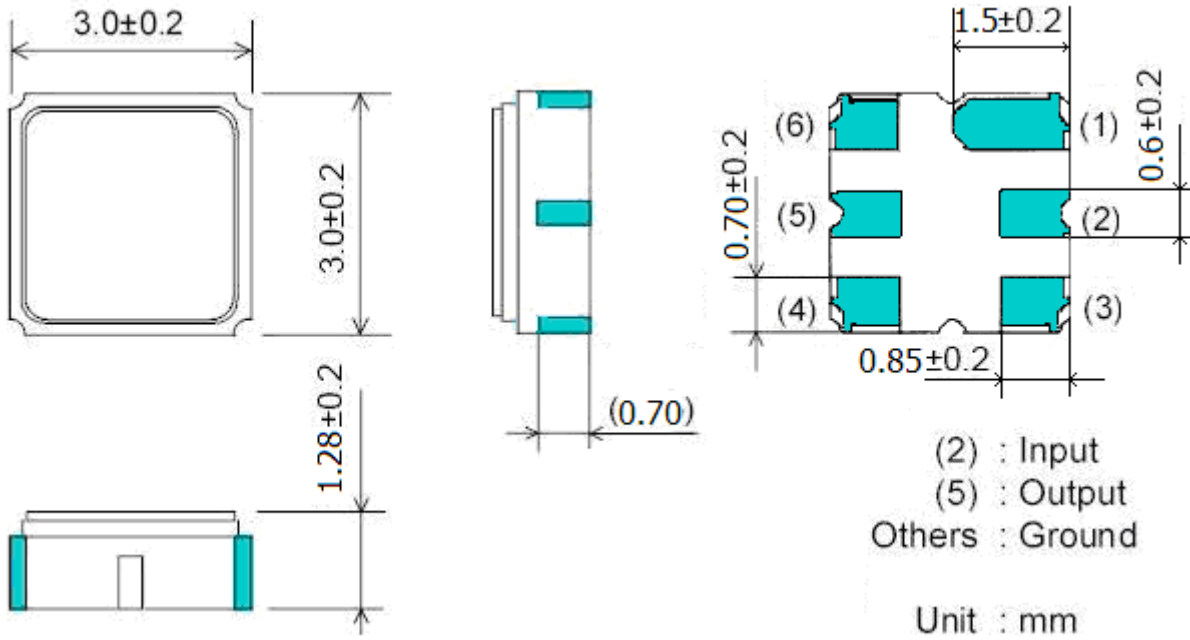

2. Performance


2.1 Maximum Rating

Operation Temperature Range	-45°C to +85°C
Storage Temperature Range	-45°C to +85°C
RF Power	10dBm

2.2 Electronic Characteristics (AT 25°C ± 5°C)

	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	-	1601.5	-
Insertion Loss (1593~1610 MHz)	dB	-	3.5	4.5
Amplitude Ripple (1593~1610 MHz)		-	0.8	1.5
VSWR(1593~1610 MHz)		-	1.6	2.0
Attenuation				
0.3 MHz ~ 1500 MHz	dB	35	45	-
1500 MHz ~ 1577MHz		20	35	
1625 MHz ~ 1650 MHz		10	15	
1650 MHz ~ 1670 MHz		20	30	
1670 MHz ~ 2000 MHz		35	40	
Input/Output Impedance	Ohms		50	

2.3 Frequency Characteristics

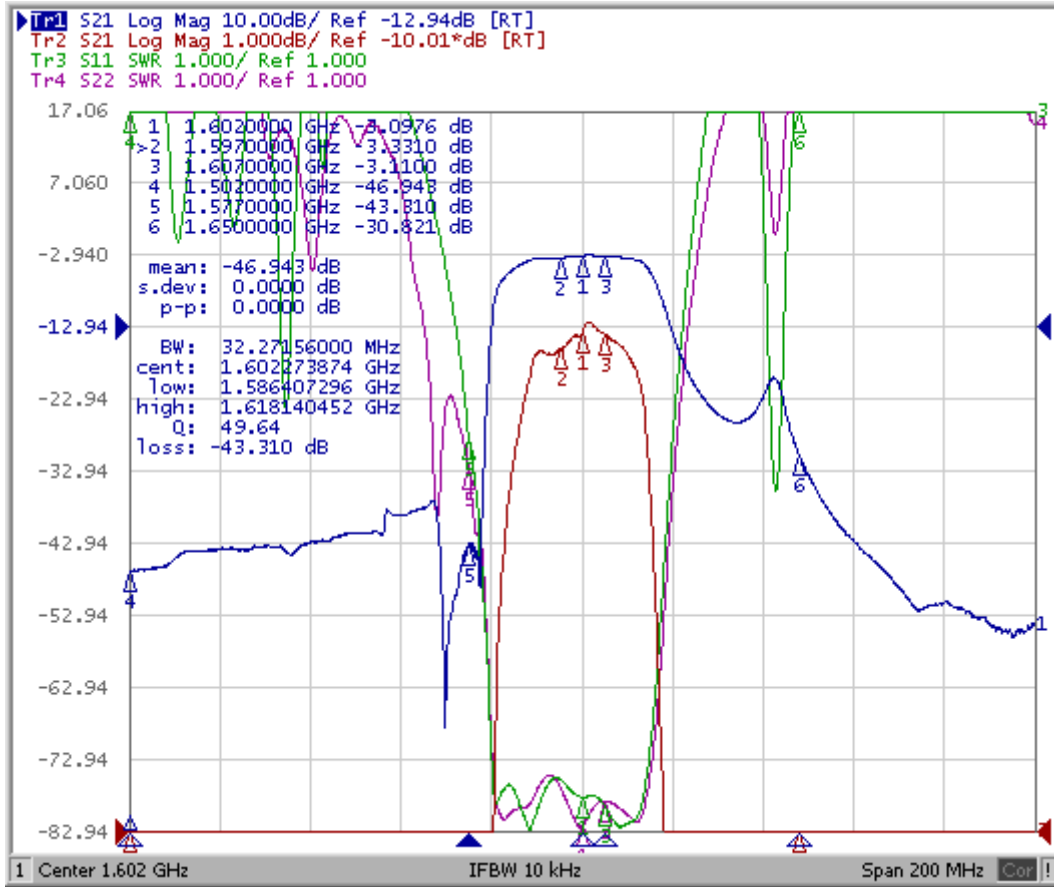

3. Test Circuit

