

规格书编号

SPEC NO : HDDB07NSBB11SP01

产品规格书

SPECIFICATION

CUSTOMER 客户: _____
PRODUCT 产品: _____ SAW DUPLEXER _____
MODEL NO 型号: _____ HDDB07NSB-B11 _____
MARKING 印字: _____ B180 _____
PREPARED 编制: _____ CHECKED 审核: _____
APPROVED 批准: _____ DATE 日期: _____ 2016-11-20 _____

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司
Shoulder Electronics Limited


更改历史记录
History Record

更改日期 Date	规格书编号 Spec. No.	产品型号 Part No.	客户产品型号 Customer No.	更改内容描述 Modify Content	备注 Remark
2016-11-20	SP01	HDDB07NSB -B11		New specification.	

1. Application

- Low-loss Saw duplexer for mobile telephone LTE Band7 systems.
- Usable passband 70MHz
- High isolation between Tx and Rx.
- Single ended to balanced transformation in Antenna - Rx path
- RoHS compatible

2. DIMENSION (PKG SIZE 1.8 x 1.4 x 0.6mm)

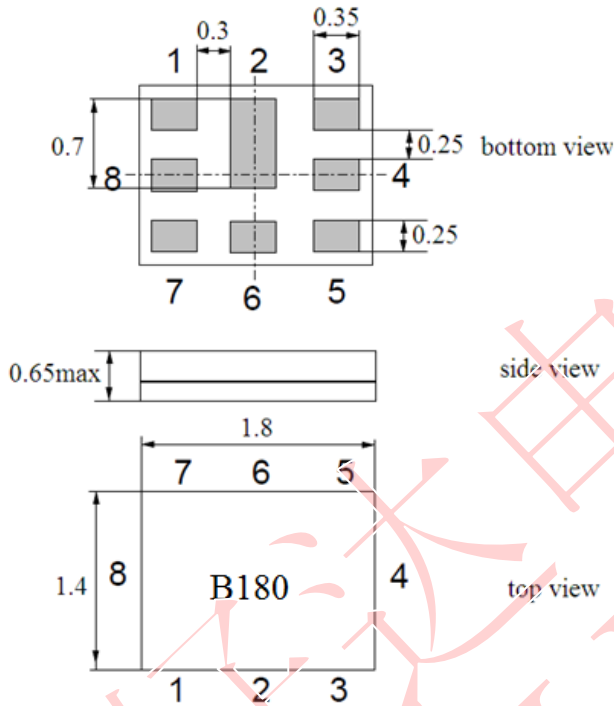


Pin configuration

- 3. Tx
- 1,8 Rx balanced
- 6. Antenna
- 2,4,5,7 To be grounded

3. Maximum Rating

Items	Conditions
Operation temperature rang	-30℃ ~ +85℃
Storage temperature rang	-40℃ ~ +85℃
ESD voltage	ESD(MM) : 50VDC
Sensitive discharge device	ESD(HBM) : 175VDC
DC Voltage VDC	3V (25+/-2 deg.C)
Moisture Sensitivity Level	MSL 2

4. TEST CIRCUIT

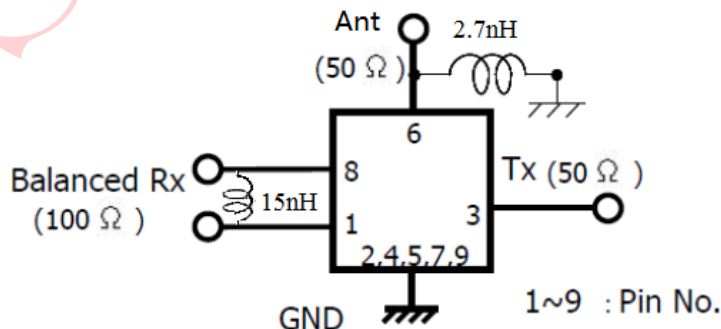

5. ELECTRICAL SPECIFICATION

Table1. Electrical Specification


Item		Condition (MHz)	Specification			Unit	
			Min	Typ	Max		
TX to ANT	Center Frequency		-	2535	-	MHz	
	Insertion loss	2500~2570	-	2.6	3.3	dB	
	Amplitude ripple	2500~2570	-	0.6	2.0	dB	
	VSWR	TX ANT	2500~2570	-	1.6	2.0	-
				-	1.6	2.0	-
	Input Power	2500~2570	+29dBm Ta=+50°C 50000h,CW				
			10~1565.42	30	45	-	dB
			1559~1605	38	45	-	dB
			1605~1680	35	45	-	dB
			1805~1880	32	45	-	dB
			1900~1920	32	45	-	dB
			2010~2050	32	42	-	dB
			2110~2170	32	42	-	dB
			2400~2473	20	37	-	dB
			2401~2468	35	37	-	dB
			2451~2473	38	40	-	dB
			2456~2478	21	28	-	dB
			2461~2483	10	15	-	dB
			2590~2595	2	9	-	dB
			2595~2620	3	16	-	dB
		2620~2690	45	48	-	dB	
	5000~5140	30	35	-	dB		
	5150~5850	19	25	-	dB		
	7500~7710	14	20	-	dB		
ANT to RX	Center Frequency		-	2655	-	dB	
	Insertion loss	2620~2690	-	2.5	2.9	dB	
	Pass band ripple	2620~2690		0.5	1.1	dB	
	VSWR	ANT Rx	2620~2690	-	1.7	2.0	-
				-	1.7	2.0	-
	Absolute attenuation		10~2500	40	50	-	dB
			832~862	40	60	-	dB
			1710~1785	40	58	-	dB
			2400~2500	40	55	-	dB
			2500~2570	45	53	-	dB
		2570~2600	2	9	-	dB	
		4900~5950	40	52	-	dB	
	7620~7830	25	35	-	dB		

Table2. Electrical Specification


Item		Condition (MHz)	Specification			Unit
			Min	Typ	Max	
TX to RX	Isolation	2500~2570	50	53	-	dB
		2620~2690	51	54	-	dB
Terminating Impedance		Tx port	50Ω			
		Rx port	100Ω//15nH			
		Ant port	50Ω//2.7nH			
Operating Temperature		-20 to +85°C				

6. Typical frequency response


Tx to Ant

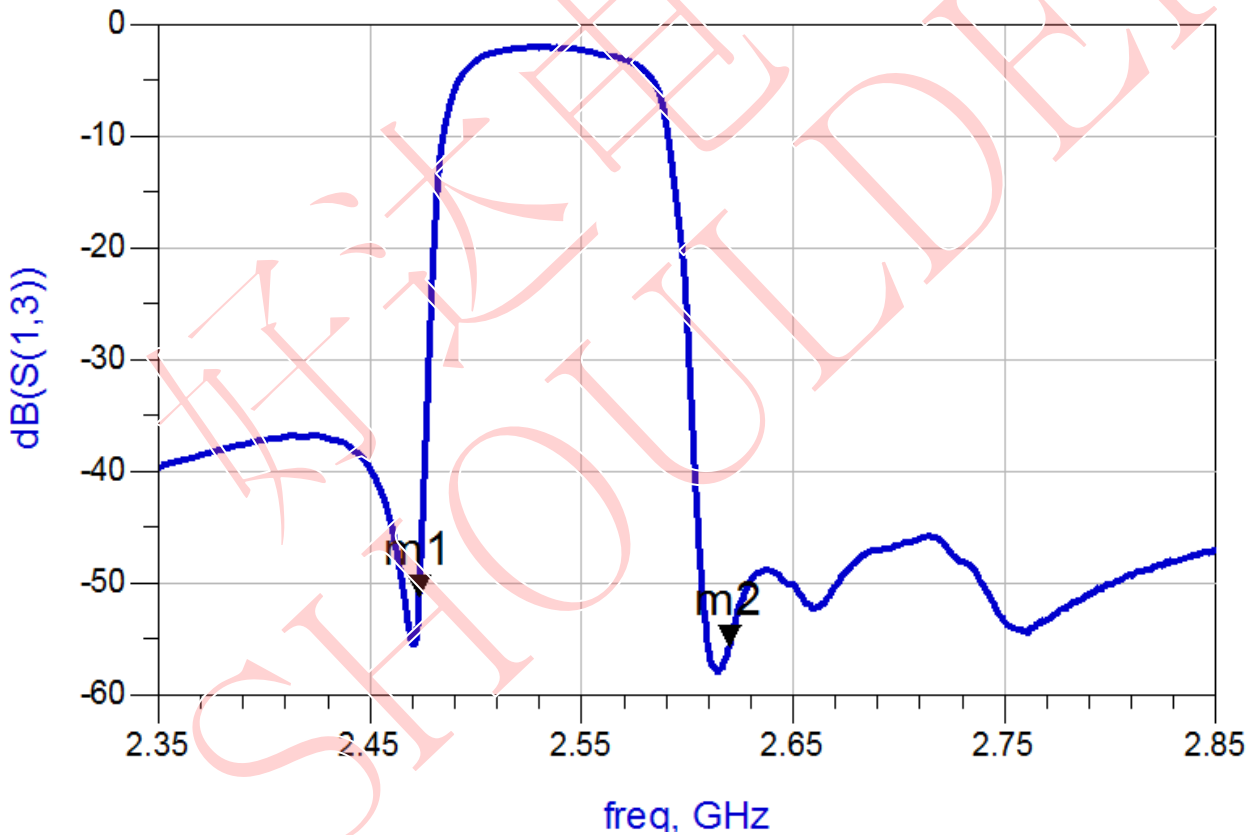

Ant to Rx

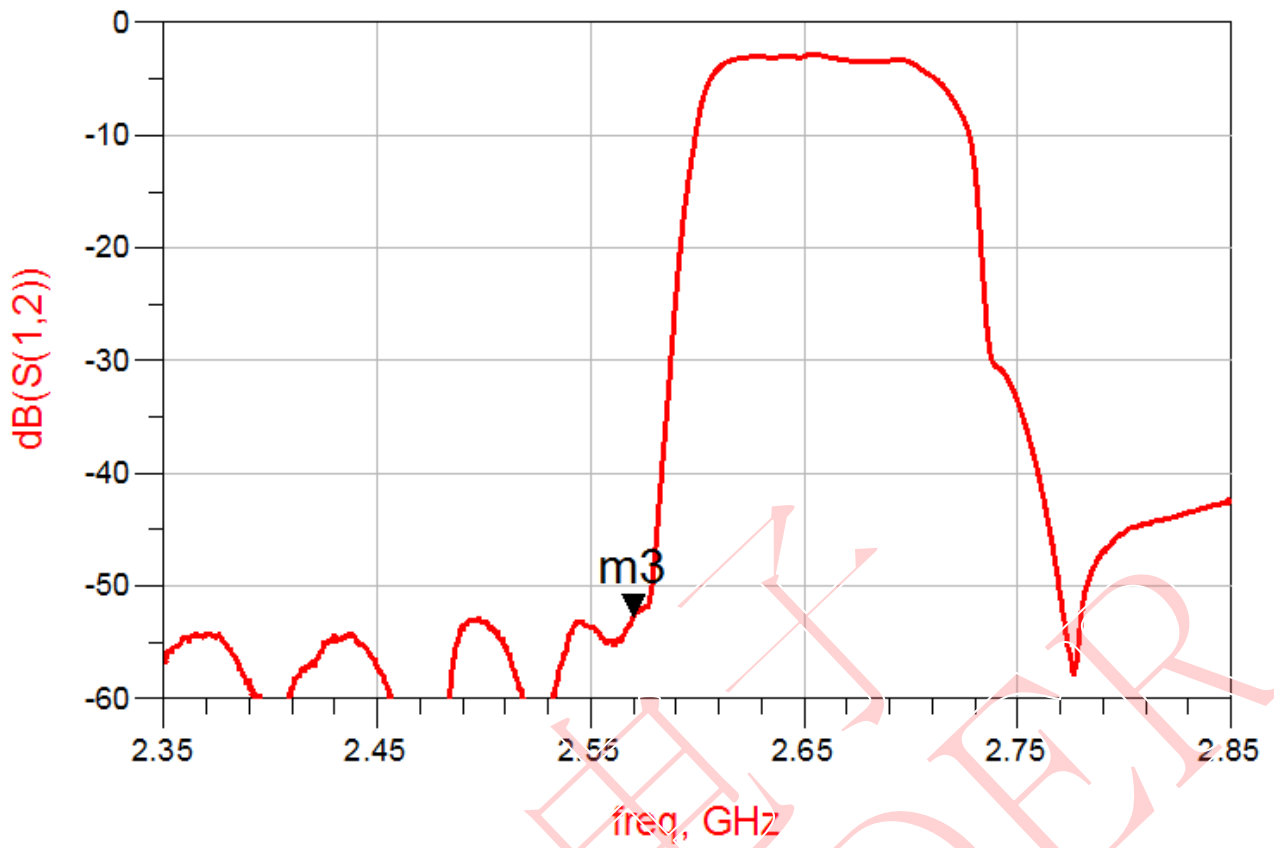

Tx to Rx Isolation

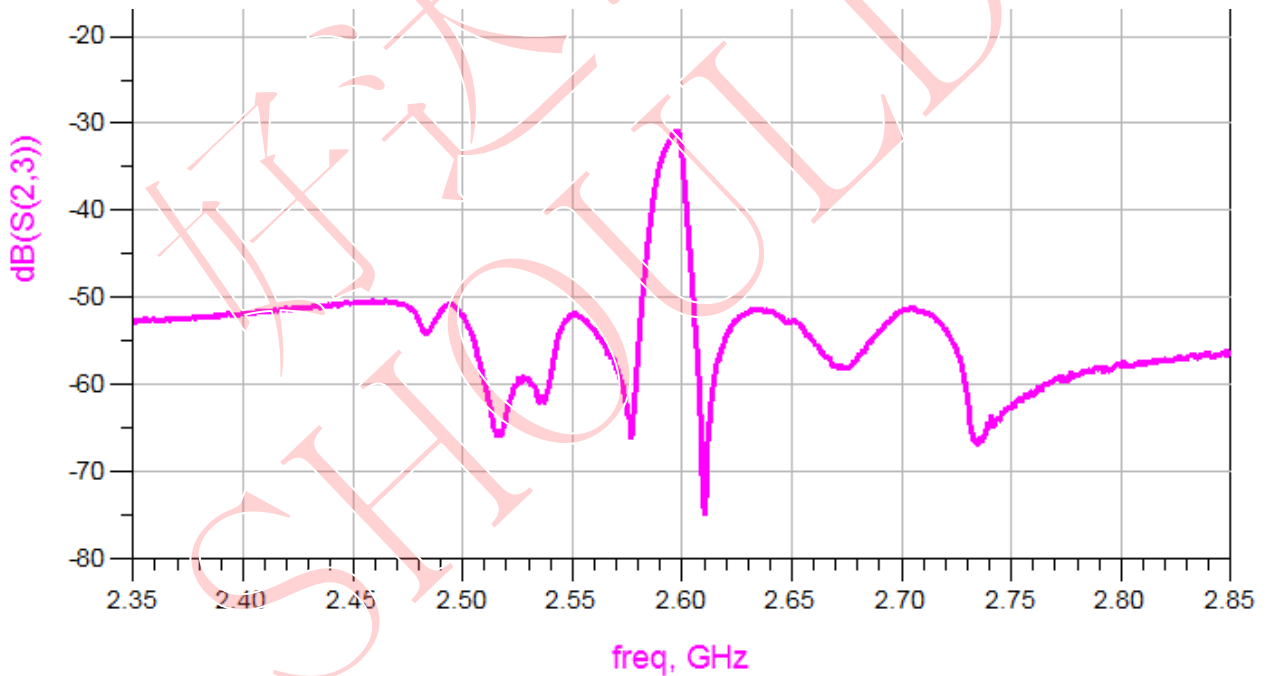

7. ENVIRONMENTAL CHARACTERISTICS

7.1 High temperature exposure

Subject the device to +85°C for 16 hours. Then release the filter into the room conditions for 24 hours prior to the measurement. It shall fulfill the specifications in 5.

7.2 Low temperature exposure

Subject the device to -40°C for 16 hours. Then release the device into the room conditions for 24 hours prior to the measurement. It shall fulfill the specifications in 5.

7.3 Temperature cycling

Subject the device to a low temperature of -40°C for 30 minutes. Following by a high temperature of +85°C for 30 Minutes. Then release the device into the room conditions for 24 hours prior to the measurement. It shall meet the specifications in 5.


7.4 Resistance to solder heat

- 1、immerge the solder bath at 260°C for 10 sec.
- 2、 the iron at 370°C for 3 sec

7.5 Solderability

Submerge the device terminals into the solder bath at 245°C ±5°C for 5s, More than 95% area of the soldering pad must be covered with new solder. It shall meet the specifications in 5.

7.6 Reflow soldering

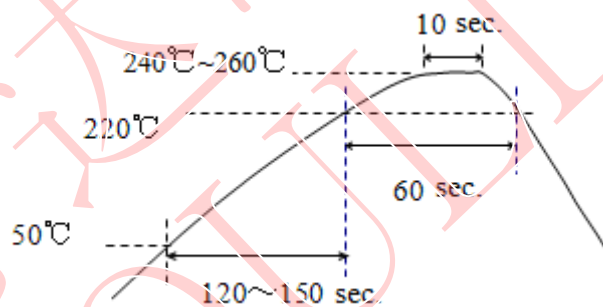

The specimen shall be passed through the reflow furnace with the condition shown in the above profile for 1 time.

The specimen shall be stored at standard atmospheric conditions for 1h, after which the measurement shall be made. Test board shall be 1.6 mm thick. Base material shall be glass fabric base epoxy resin.

7.7 Mechanical shock

Drop the device randomly onto the concrete floor from the height of 1m 3 times. the device shall fulfill the specifications in 5.

7.8 Vibration

Subject the device to the vibration for 1 hour each in x,y and z axes with the amplitude of 1.5 mm at 10 to 55 Hz. The device shall fulfill the specifications in 5.

8. REMARK

8.1 Static voltage

Static voltage between signal load & ground may cause deterioration & destruction of the component. Please avoid static voltage.

8.2 Ultrasonic cleaning

Ultrasonic vibration may cause deterioration & destruction of the component. Please avoid ultrasonic cleaning

8.3 Soldering

Only pad component may be solded. Please avoid soldering another part of component.

9. Packing

9.1 Dimensions

(1) Carrier Tape: Figure 1

(2) Reel: Figure 2


(3) The product shall be packed properly not to be damaged during transportation and storage.

9.2 Reeling Quantity

10000 pcs/reel ϕ 257.5mm

9.3 Taping Structure


(1) The tape shall be wound around the reel in the direction shown below.

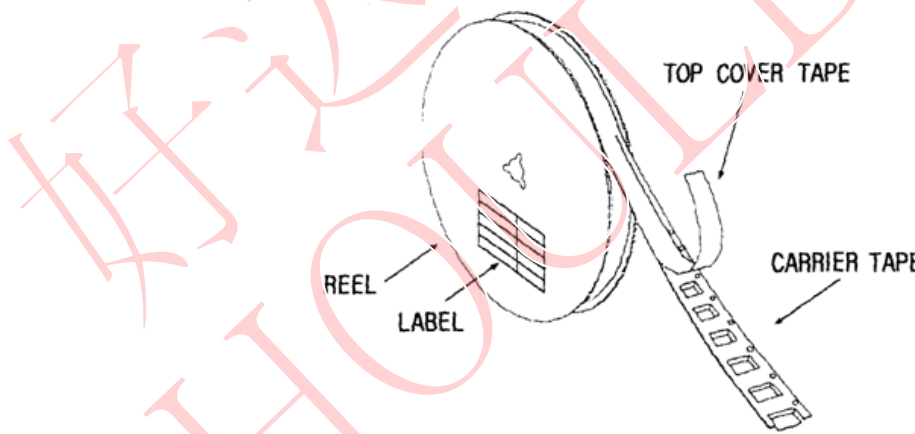

(2) Label

Device Name	
Marking	
User Product Name	
Quantity	
Lot No.	

(3) Leader part and vacant position specifications.

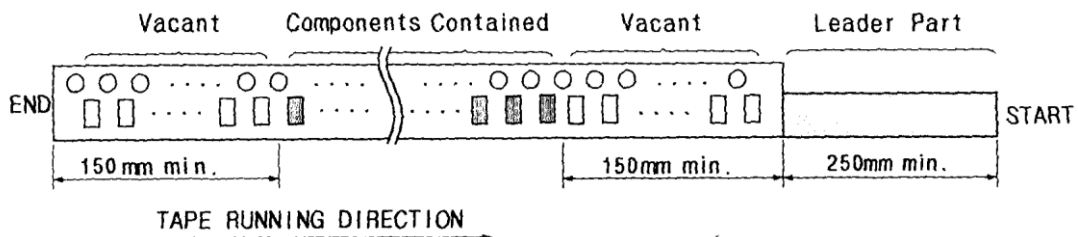


10. TAPE SPECIFICATIONS


10.1 Tensile Strength of Carrier Tape: 4.4N/mm width

10.2 Top Cover Tape Adhesion (See the below figure)


- (1) pull off angle: 0~15°
- (2) speed: 300mm/min.
- (3) force: 20~70g

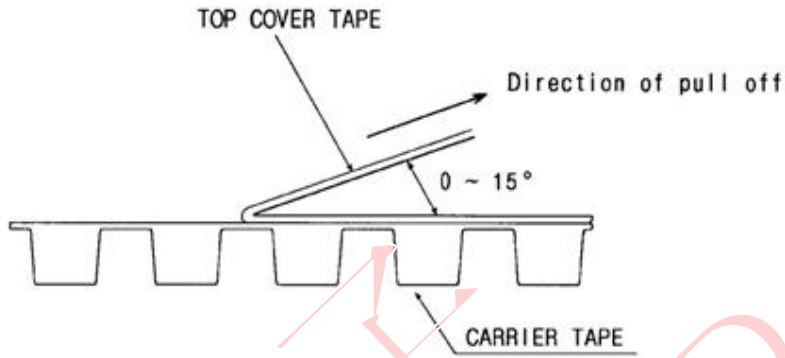

[Figure 1] Carrier Tape Dimensions

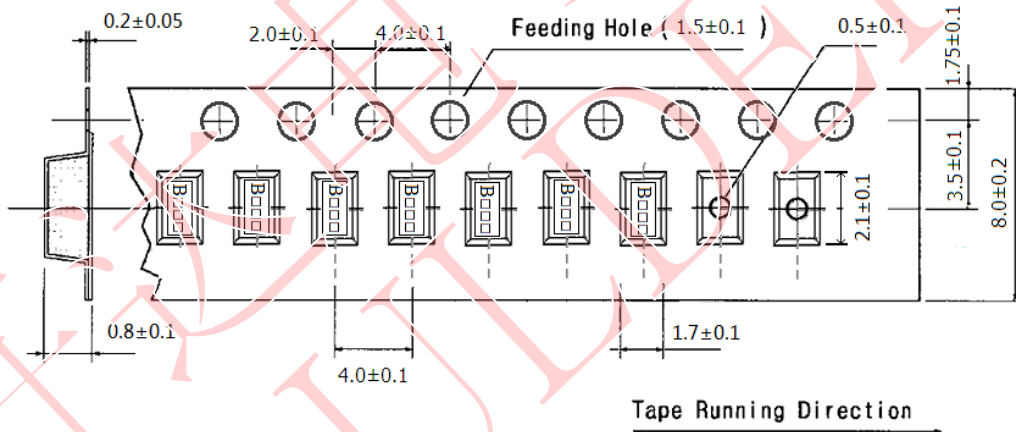

[Figure 2] 10000 pcs/reel φ 257.5mm

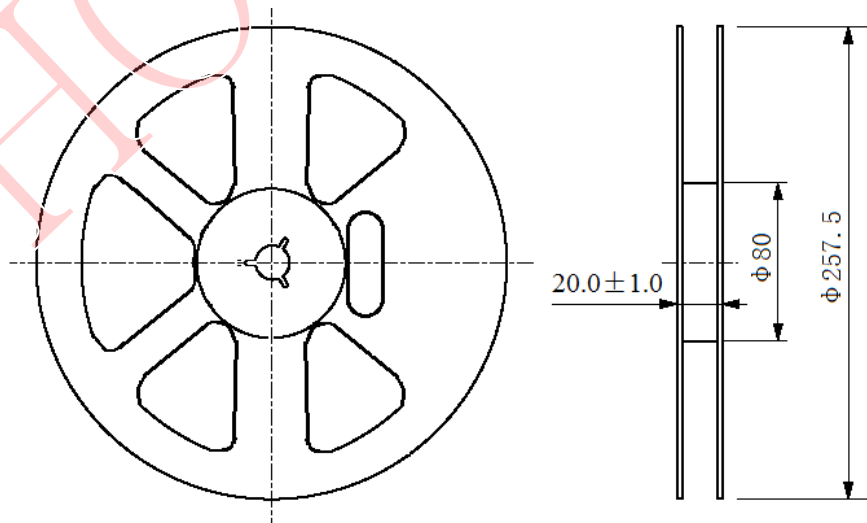

φ 257.5 Reel Dimension

(in mm)